

HT¹⁸² TOPCon

Bifacial Series

640~660W

Main Features

N-TYPE TOPCON TECH

- Lower LID
- Excellent Low Irradiance

SMBB + NON-DESTRUCTIVE CUTTING

- Reduced Internal Current Loss
- Minimized Micro-Crack Impact

HIGH RELIABILITY

- Salt Mist Resistance, Ammonia Resistance, Sand & Dust Resistance
- Anti-PID

HIGH CONVERSION EFFICIENCY

- Up to 23.6%
- Bifaciality Rate Up to 80±5%

SUPERIOR POWER GENERATION PERFORMANCE


- Lower Operating Temperature

LOWER LEVELIZED COST OF ELECTRICITY

- Lower BOS and LCOE
- Higher ROI

Comprehensive Products and System Certifications

- ISO 9001 2015
- ISO 14001 2015
- ISO 45001 2018

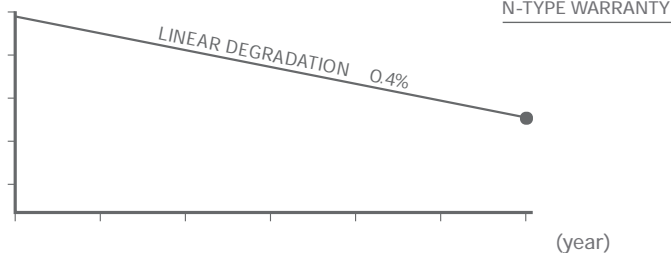

15 YEAR
Product Workmanship Warranty

30 YEAR
Linear Power Warranty

1%
First - year power attenuation

0.4%
Linear power attenuation




HONGYUAN GREEN ENERGY CO.,LTD.
© HONGYUAN GREEN ENERGY CO.,LTD. all rights reserved.
The product specifications are subject to change without prior notice.
Please use our latest version.

Group Headquarter: Building 7, Changguangxi Wetland Park, Lihu Avenue, Binhu District, Wuxi City, Jiangsu Province, China

Tel:

E-mail: info@hysolar.com

Web: <https://www.hysolar.com>

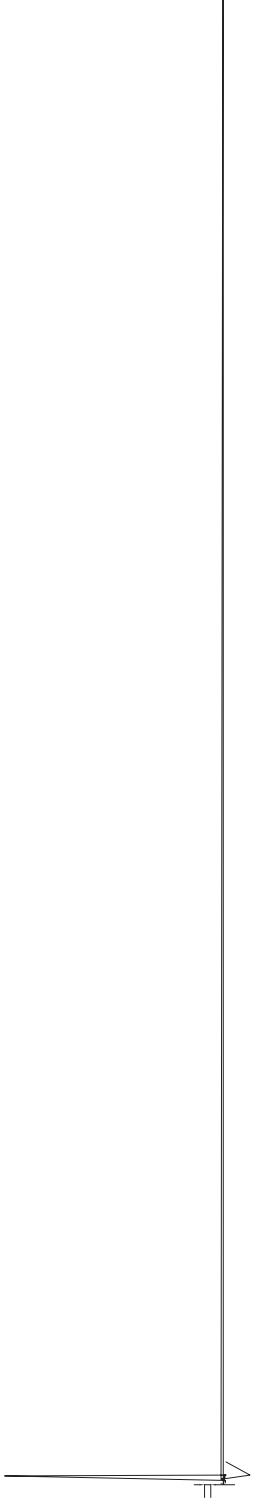

14
D
A